

NANO CLEAN MATT INTERIOR PAINT



Application Recommendation

Application Areas

- Variety of color, light and varying according to the applied surface superior texture and decorative features.
- Apartment buildings, sites, markets, stores open spaces such as with hiding, high resistance to washing and wiping.
- Schools, hospitals, that require a high hygiene with under the light of the self-cleaning.
- Applicable cleaned every dirt, oil, dry and solid of the swollen layers. Can obtain maximum benefit from the Nano Clean Matt Interior Paint, must be removed from accordance mortar, raw concrete, cement, gypsum board, and made ceiling paint, dirt, dust and adhesion surfaces. Should be cleaned worm, swollen, completely perforated plate of paints.

Equipment



Fillers



Gypsum Undercoat



Acrylic Putty



Nano Clean Interior Undercoat



Nano Clean Interior Paint

Equipment



Scraper



Gypsum trowel



Putty shovel



Spatula



Trowel



Dust Cloth



Brush



Mixer



Adjustable Stick



Paint Bucket



Sprayer

Surface Preparation



Mortar



Concrete



Cement Board



Gypsum Panels



Old Plastic Paint



Plaster Board




Glasstextile




Wallpaper

- Nano Clean Matt Interior Paint applicable cleaned every dirt, oil, dry and solid of the swollen layers. Can obtain maximum benefit from the Nano Clean Matt paint, must be removed from accordance mortar, raw concrete, cement, gypsum board and made ceiling paint, dirt, dust and adhesion surfaces. Should be cleaned worm, swollen, completely perforated plate of paints.
- If there is not particular a new object to be painted like grain mortar, concrete, cement must be smoothed with satin plaster.
- If necessary, surface cracks should be filled with putty and defects corrected.
- The Best way to achieve silky to touch after smoothing to entire surface to be applied.

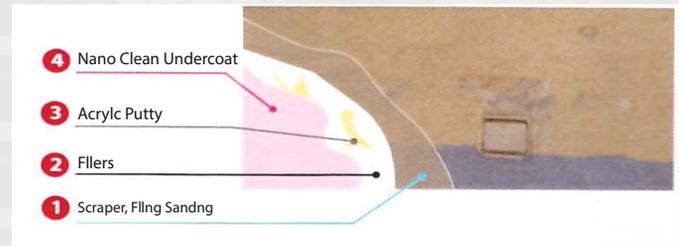

After



During application and during the subsequent 24 hours at the ambient temperature of the surface should be +5 ° C.



Before application Nano Clean Interior Paint should be mixed.



Nano Clean Matt Interior Paint thinned with clean water 10% and application for two layer by brush, roller or spray.



Should be waited minimum 6 hours between layers.

After Application

Application tools should be washed with water after use immediately.

Nano Clean Matt Interior Paint



Interior

Water

Product Code 05

Product Description


- Acrylic emulsion based, photocatalytic (self cleanable with light), silicony, easily cleanable and excellent wipeable, applied on silk matt texture, interior decorative interior last layer paint.

Application Areas

- In interior surfaces, such as mortar, concrete, cement, boards, gypsum panel.
 - Old painted surfaces.
- On glasstextile, putty and wallpaper.

Advantages

- Cigarette smoke, heat and odors by breaking down harmful substance such as heat destroy activate light transported by air to the ceiling surface thanks photocatalytic.
 - Showing resistance to mold and fungus; provides relief especially for asthmatics.
 - Indelible and easily cleaned.
 - It has superior cover power.
 - Throws damp out and let the building breathe.
 - Gives the smooth brightness which deploys the light excellently.
- Does not harm health of environment and not smell because solvent free and diluted with water.

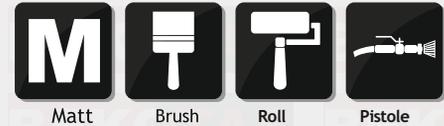

Technical specifications:

Structure

- Acrylic emulsion based, water based

Diluting

- Water

Appearance on the packing

- Dark, Stable, Jelly

Dry Appearance

- Matt, Pastel, Smooth

Color

- In stock white. Custom manufacturing for any orders.

Water. Vaporpermeability

- SD (m) (TS EN ISO 7783-2): Approximately: 180

Drying Time

- (between +5 +35 °C) starting time to second layer is 6 hours, completely drying time 24 hours. Ossification time is one week. Lower temperature and high relative humidity extends the drying time.

Coverage

- Depending on the surface smoothness and absorbency approximately 17-20 m²/lt. per a layer.



Shelf Life

- In package and in 5-35 °C 2 years

Packing

- 20 - 10 and 3,5kg plastic bucket.

Safety Recommendations

- S2: Keep out the reach of children.
- S24/25: Avoid contact with eyes and skin.
- S26: In case of contact with eyes immediately wash with water and contact with a doctor.
- S28: In case of contact with skin immediately wash with water.
- S29: Do not discharge into drains or water courses.
- S46: If swallowed, seek medical advice immediately and show the container or label. Mix before using. Close the cover after using. Protect from frost and direct sunlight.

Quality Certificate

TSE TS 5808

Public exposure No. 04.524/604.506/E3