

PAVONE DECORATIVE MARBLE PAINT



Application Recommendations

Application Areas

• Smooth painted surfaces, textured surface and similar products coated any walls, luxury housing in the interiors of commercial and industrial buildings; used with the crating aim of authentic and ancient effects.

Equipment



Fillers



Gypsum Undercoat



Acrylic Putty



Interior Undercoat



PAVONE
DECORATIVE
MARBLE PAINT

Equipment



Scraper



Gypsum trowel



Putty shovel



Spatula



Trowel



Dust Cloth



Brush



Mixer



Adjustable Stick



Paint Bucket



Steel Trowel

Surface Preparation



Mortar



Concrete



Cement Board



Gypsum Panels



Old Plastic Paint



Plaster Board




Glasstextile



Wallpaper

- Pavone Decorative Marble Paint applicable cleaned every dirt, oil, dry and solid of the swollen layers. Can obtain maximum benefit from the Pavone Decorative Marble Paint, must be removed from accordance mortar, raw concrete, cement gypsum board and made ceiling paint, dirt, dust and adhesion surfaces. Should be cleaned worm, swollen, completely perforated plate of paints.
- If there is not particular a new object to be painted like grain mortar, concrete, cement must be smoothed with satin plaster
- If necessary, surface cracks should be filled with putty and defects should be corrected.
- Should be cleaned old painted moldy surfaces on the wall before application with damp cloth. Thoroughly with emery paper, the surface must be removed. If soot and mold drying preemptive 2-3 coats should be applied.
- Is recommended in order to benefit from the better brightness from the Pavone Decorative Marble Paint use Gold Bright Satin Paint before Pavone Decorative Marble Paint.

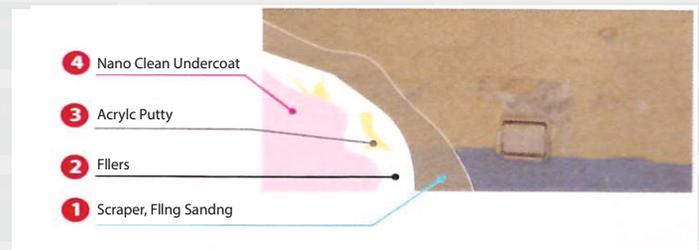

Application



During application and during the subsequent 24 hours at the ambient temperature of the surface should be +5 C.



Before application Pavone Decorative Marble Paint should be mixed.



Pavone Decorative Marble Paint thinned with clean water 10% and application for two layer by brush, roller or spray.



Should be waited minimum 6 hours between layers.

After Application

Application tools should be washed with water after use immediately.

PAVONE DECORATIVE MARBLE PAINT



Interior

Water

Product Code 80

Product Description


- ◆ It is decorative paint, giving marble image and marble brightness on the applied surface. Is suitable for the restoration of worn surfaces, these giving to surfaces smooth and velvety appearance.

Application Areas

- ◆ It is decorative paint, giving marble image and marble brightness on the applied surface. Is suitable for the restoration of worn surfaces, these giving to surfaces smooth and velvety appearance.

Advantages

- ◆ Showing resistance to mold and fungus; provides relief especially for asthmatics.
- ◆ Application is easy
- ◆ Give attractive effect on the surface.
- ◆ Can be applied on many materials.
- ◆ It is resistant to water
- ◆ Has a decorative feature.



Technical specifications:

Structure

- ◆ Acrylic emulsion based, water based

Diluting

- ◆ Water

Appearance on the packing

- ◆ Dark, Stable, Jelly

Dry Appearance

- ◆ Bright, Smooth.

Color

- ◆ In stock white.
Custom manufacturing for any orders.

Water Vapor permeability

- ◆ SD (m) (TS EN ISO 7783-2):
approximately:75

Drying Time

- ◆ (between +5 +35 °C) starting time for the second layer is 2 hours, drying time is 24 hours. Ossification time is one week. Lower temperature and high relative humidity lengthens the drying time.

Coverage

- ◆ Depending on the surface smoothness and absorbency approximately 2,3-2,8 m²/lt. per a layer

Shelf Life

- ◆ In package and in 5-35 °C 2 years

Packing

- ◆ 20 - 10 - 3,5 - 1kg plastic bucket.

Safety Recommendations

- ◆ S2: Keep out the reach of children.
- ◆ S24/25: Avoid contact with eyes and skin.
- ◆ S26: In case of contact with eyes immediately wash with water and contact with a doctor.
- ◆ S28: In case of contact with skin immediately wash with water.
- ◆ S29: Do not discharge into drains or water courses.
- ◆ S46: If swallowed, seek medical advice immediately and show the container or label.
- ◆ Mix before using. Close the cover after using.
- ◆ Protect from frost and direct sunlight.



Quality Certificate

- ◆ TSE TS 5808
Public exposure No. 04.524/604.506/E3