

GOLD DECORATIVE Metallic Sedef Effect Paint



Application Recommendations

Application Areas

• Smooth painted surfaces, textured surface and similar products coated any walls, luxury housing in the interiors of commercial and industrial buildings; used with the crating aim of authentic and ancient effects.

Equipment



Fillers



Gypsum Undercoat



Acrylic Putty



Interior Undercoat



GOLD DECORATIVE
Metallic Sedef
Effect Paint

Equipment



Scraper



Gypsum trowel



Putty shovel



Spatula



Trowel




Dust Cloth



Brush



Mixer



Decor Roller



Sponge



Effects Stamp

Surface Preparation



Mortar



Concrete



Cement Board



Gypsum Panels



Old Plastic Paint



Plaster Board



Glasstextile



Wallpaper

• Gold Decorative Metallic Sedef Effect Paint applicable cleaned every dirt, oil, dry and solid of the swollen layers. Can obtain maximum benefit from the Decorative Metallic Sedef Effect Paint, must be removed from accordance mortar, raw concrete, cement gypsum board and made ceiling paint, dirt, dust and adhesion surfaces. Should be cleaned worm, swollen, completely perforated plate of paints.


• If there is not particular a new object to be painted like grain mortar, concrete, cement must be smoothed with satin plaster

• If necessary, surface cracks should be filled with putty and defects should be corrected.


• Should be cleaned old painted moldy surfaces on the wall before application with damp cloth. Thoroughly with emery paper, the surface must be removed. If soot and mold drying preemptive 2-3 coats should be applied.

• Is recommended in order to benefit from the better brightness from the Gold Decorative Metallic Sedef Effect Paint use Gold Bright-

ness Satin Paint before Gold Decorative Metallic Sedef Effect Paint.

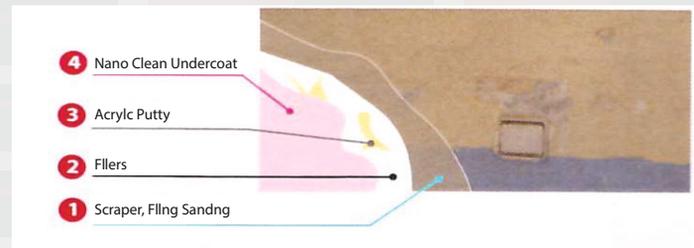

Application



During application and during the subsequent 24 hours at the ambient temperature of the surface should be +5 C.



Before application Gold Decorative Metallic Sedef Effect Paint should be mixed.



Gold Decorative Metallic Sedef Effect Paint thinned with clean water 10% and application for two layer by brush, roller or spray.



Should be waited minimum 6 hours between layers.

After Application

Application tools should be washed with water after use immediately.

GOLD DECORATIVE Metallic Sedef Effect Paint



Interior

Water

Product Code 75

Product Description

- ◆ Giving view pearlescent on the surfaces, capable of pearl effect, odorless and water-based. Antistatic, and can be washed. Easily applied metal board, cement board, gypsum board and prepared smooth surface. Eco-friendly, high coverage, flexible, applied to surfaces for decorative

Application Areas

- ◆ In the interiors of buildings, all kinds of wall surfaces.

Advantages

- ◆ Showing resistance to mold and fungus; provides relief especially for asthmatics.
- ◆ Application is easy
- ◆ Give attractive effect on the surface.
- ◆ Can be applied on many materials.
- ◆ It is resistant to water
- ◆ Has a decorative feature.
- ◆ Does not harm health of environment and not smell because solvent free and diluted with water.



Technical specifications:

Structure

- ◆ Acrylic emulsion based, water based

Diluting

- ◆ Water

Appearance on the packing

- ◆ Dark, Stable, Jelly

Dry Appearance

- ◆ Bright, Smooth.

Color

- ◆ In stock white. Custom manufacturing for any orders.

Water. Vaporpermeability

- ◆ SD (m) (TS EN ISO 7783-2): approximately:75

Drying Time

- ◆ Drying time 6 hours for 2 layer. Fuldry 24 hours. Lower temperature and higher relative humidity will lengthen drying time.

Coverage

- ◆ Depending on the surface smoothness and absorbency approximately 7-10 m²/lt. per a layer.

Shelf Life

- ◆ In package and in 5-35 °C 2 years

Packing

- ◆ 15-7,5-2,5 kg plastic bucket.

Safety Recommendations

- ◆ S2: Keep out the reach of children. S24/25: Avoid contact with eyes and skin. S26: In case of contact with eyes immediately wash with water and contact with a doctor. S28: In case of contact with skin immediately wash with water. S29: Do not discharge into drains or water courses. S46: If swallowed, seek medical advice immediately and show the container or label. Mix before using. Close the cover after using. Protect from frost and direct sunlight.



Quality Certificate

- ◆ TSE TS 5808
Public exposure No. 04.524/604.506/E3