

GOLD EXPOSED CONCRETE Exterior Undercoat



Application Recommendations

Application Areas

- In columns and ceiling plaster and cement-based plaster is applied prior to the paint.

Equipment



Fillers



Gypsum Undercoat



Acrylic Putty



Exposed Concrete Undercoat

Equipment



Scraper



Gypsum trowel



Putty shovel



Spatula



Trowel



Dust Cloth



Brush



Mixer



Adjustable Stick



Paint Bucket

Surface Preparation



Mortar



Concrete



Cement Board




Gypsum Panels

• Gold Exposed Concrete Undercoat can be applied to every cleaned every dirt, oil, dry and solid of the swollen layers. Can obtain maximum benefit from the Gold Exposed Concrete Undercoat must be removed from accordance mortar, raw concrete, cement, gypsum board and made ceiling paint, dirt, dust and adhesion surfaces. Should be cleaned worm, swollen, completely perforated plate of paints.

• If there is not particular a new object to be painted like grain mortar, concrete, cement must be smoothed with satin plaster.

• If necessary, surface cracks should be filled with putty and defects should be corrected.

• Before applying bloated, flabby and unhealthy-looking surfaces should be scraped, sanded lightly grease and dirt removed the old synthetic surface painted surfaces. Volume thinned with 10% water Transition Primer is applied by brush or roller in a single layer.

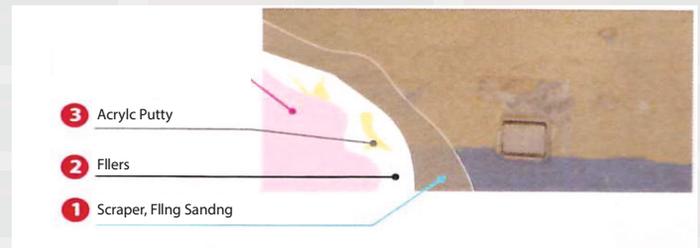

Application



During application and during the subsequent 24 hours at the ambient temperature of the surface should be +5 ° C.



Before application Gold Exposed Concrete Undercoat should be mixed.



Gold Exposed Concrete Undercoat thinned with clean water 10% and application for two layer by brush, roller or spray.



Should be waited minimum 6 hours between layers.

After Application

Application tools should be washed with water after use immediately.

GOLD EXPOSED CONCRETE Exterior Undercoat



Exterior

Water

Product Code: 130

Product Description

- Exposed Concrete Undercoat is a acrylic based undercoat.

Application Areas

- In columns and ceiling plaster and cement-based plaster is applied prior to the paint.

Advantages

- Gold Exposed Concrete Undercoat; due to the nature of the substrate to penetrate deep into the interior of the next layer of paint on the application surface and creates a solid foundation by integrating.
- It is excellent water vapor permeability.
- Does not harm health of environment and not smell because solvent free and diluted with water.



Matt



Brush



Roll

Technical specifications:

Structure

- Acrylic emulsion based, water based

Diluting

- Water

Appearance on the packing

- Dark, Stable, Jelly

Dry Appearance

- Matt, Pastel, Rough

Color

- In stock green. Custom manufacturing for any orders.

Water Vapor permeability

- SD (m) (TS EN ISO 7783-2): approximately: 180

Drying Time

- (between +5 +35 °C) starting time to last layer is 6 hours. Lower temperature or high relative humidity lengthens the drying time.

Coverage

- Depending on the surface smoothness and absorbency approximately 6,5-8 m²/lt. per a layer. Depending on the surface smoothness and absorbency approximately 6,5-8 m²/lt. per a layer.

Shelf Life

- In package and in 5-35 °C 2 years

Packing

- 20 - 15 and 12kg plastic bucket.

Safety Recommendations

- S2: Keep out the reach of children. S24/25: Avoid contact with eyes and skin. S26: In case of contact with eyes immediately wash with water and contact with a doctor. S28: In case of contact with skin immediately wash with water. S29: Do not discharge into drains or water courses. S46: If swallowed, seek medical advice immediately and show the container or label. Mix before using. Close the cover after using. Protect from frost and direct sunlight.

Quality Certificate

- TS 5808
Public exposure No. 04.524/604.506/E3

