

# GOLD Acrylic Exterior Undercoat



## Application Recommendations

### Application Areas

- In exterior, can be used on the surfaces such as in accordance mortar, concrete, cement, boards, gypsum panel.

## Equipment



Fillers



Gypsum Undercoat



Acrylic Putty



BEKOTAS Boya



Gold Acrylic Exterior Lining

## Equipment



Scraper



Gypsum trowel



Putty shovel



Spatula



Trowel



Dust Cloth



Brush



Mixer



Adjustable Stick



Paint Bucket



Sprayer

## Surface Preparation



Mortar



Concrete



Cement Board



Gypsum Panels




Old Plastic Paint

• Gold Acrylic Exterior Undercoat applicable cleaned every dirt, oil, dry and solid of the swollen layers. Can obtain maximum benefit from the Gold Acrylic Exterior Undercoat, must be removed from accordance mortar, raw concrete, cement gypsum board and made ceiling paint, dirt, dust and adhesion surfaces. Should be cleaned worm, swollen, completely perforated plate of paints.

• If there is not particular a new object to be painted like grain mortar, concrete, cement must be smoothed with satin plaster

• If necessary, surface cracks should be filled with putty and defects should be corrected.

• Old painted moldy surfaces before application on the surface should be cleaned with damp cloth. Thoroughly with emery paper, the surface must be removed. If soot and mold drying preemptive 2-3 coats should be applied.

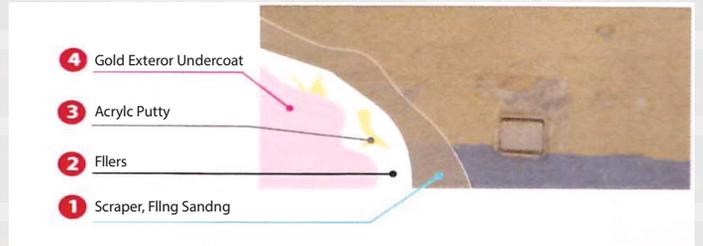

## Application



During application and during the subsequent 24 hours at the ambient temperature of the surface should be +5 ° C.



Before application Gold Acrylic Undercoat should be mixed.



Gold Acrylic Undercoat thinned with clean water 10% and application for two layer by brush, roller or spray.



Should be waited minimum 6 hours between layers.

## After Application

Application tools should be washed with water after use immediately.

# GOLD ACRYLIC Exterior Undercoat



Exterior

Water

Product Code: 225

## Product Description

- It is acrylic emulsion based, resistant mildew and algae exterior undercoat.

## Application Areas

- In exterior, can be used on the surfaces such as in accordance mortar, concrete, cement, boards, gypsum panel.
- Old painted surfaces.

## Advantages

- High water vapor permeability and water vapor thrown away without wetting allows the building to breathe.
- Shows resistance to mold and fungus; provides relief especially for asthmatics.
- It has superior cover power.
- Not affected severe weather conditions like rain, snow, humidity and extreme cold or hot.
- Does not harm health of environment and not smell because solvent free and diluted with water.



Matt



Brush



Roll



Spray Pistle

## Technical specifications:

### Structure

- Acrylic emulsion based, water based

### Diluting

- Water

### Appearance on the packing

- Dark, Stable, Jelly

### Dry Appearance

- Matt, Pastel, Smooth

### Color

- White

### Water Vapor permeability

- SD (m) (TS EN ISO 7783-2):  
Approximately: 180

### Drying Time

- (between +5 +35 °C) complete drying time is 24 hours. Ossification time is one week. Lower temperature or high relative humidity lengthens the drying time.

### Coverage

- Depending on the surface smoothness and absorbency approximately 16-19 m<sup>2</sup>/lt. per a layer.

### Shelf Life

- In package and in 5-35 °C 2 years

### Packing

- 20 kg plastic bucket.

### Safety Recommendations

- S2: Keep out the reach of children.
- S24/25: Avoid contact with eyes and skin.
- S26: In case of contact with eyes immediately wash with water and contact with a doctor.
- S28: In case of contact with skin immediately wash with water.
- S29: Do not discharge into drains or water courses.
- S46: If swallowed, seek medical advice immediately and show the container or label. Mix before using. Close the cover after using. Protect from frost and direct sunlight.

### Quality Certificate

- TS 5808  
Public exposure No. 04.524/604.506/E3

