

BEKOTAŞ BARK LEAF PLASTER (11+4)



Application Recommendations

Application Areas

- Can be applied all interior and exterior of buildings, fiber board, fiber cement board's surfaces.

Equipment



Fillers



Gypsum Undercoat



Acrylic Putty



Exterior Undercoat



Leaf Plaster

Equipment



Scraper



Gypsum trowel



Puttyshovel



Spatula



Trowel



Dust Cloth



Brush




Mixer



Adjustable Stick



Paint Bucket



Puttyshovel

Surface Preparation



Mortar



Concrete



Cement Board



Gypsum Panels



Old Plastic Paint



Plaster Board




Glasstextile



Wallpaper

- Surface should be dry and moisture.
- Before application Bark Leaf Plaster must be mixed.

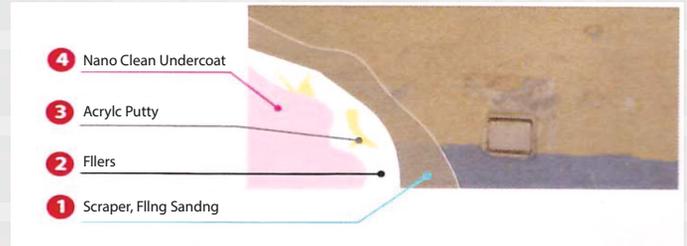

Application



During application and during the subsequent 24 hours at the ambient temperature of the surface should be +5 ° C.



Before application Bekotaş Bark Leaf Plaster should be mixed.



Bekotaş Bark Leaf Plaster thinned with clean water 10% and application for two layer by brush, roller or spray.



Should be waited minimum 6 hours between layers.

After Application

Application tools should be washed with water after use immediately.

BEKOTAŞ BARK LEAF PLASTER (11+4)

BEKOTAŞ
Boya

Exterior

Interior

Water

Product Code: 215

Product Description


- ◆ Bark Leaf Plaster is ready plaster that is formed by particles passing through private transaction colored, can be used on exterior and interior facade with special processing of color shell particles pass unaffected by water.

Application Areas

- ◆ Can be applied all interior and exterior of buildings, fiber board, fiber cement board's surfaces.

Advantages

- ◆ It has superior cover power.
- ◆ With high water vapor permeability allows the building to breathe thrown out of steam.
- ◆ Not affected rain, snow, humidity, by severe weather conditions such as extreme cold or hot; not swell, crack and fade colors.
- ◆ Resistant to alkaline.
- ◆ Does not harm health of environment and not smell because solvent free and diluted with water.

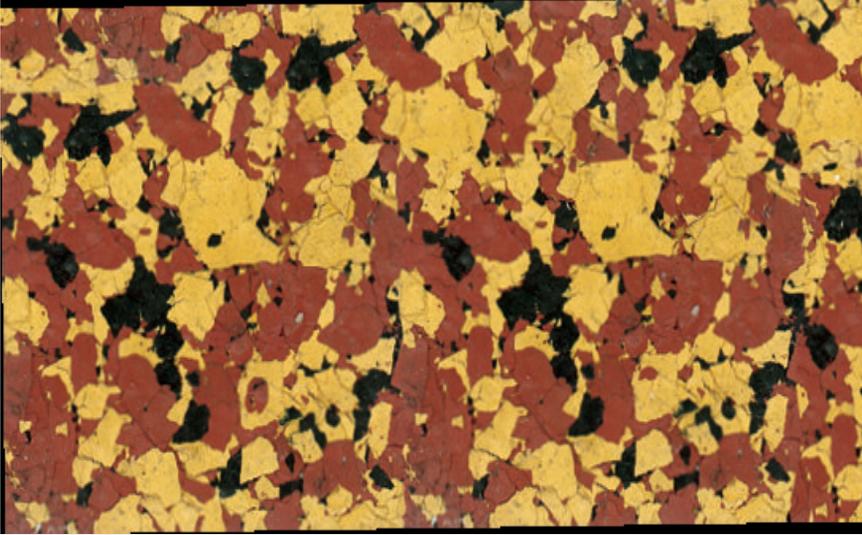

Matt



Trowel

Technical specifications:

Structure

- ◆ Acrylic emulsion based, water based

Diluting

- ◆ Water

Appearance on the packing

Dry Appearance

- ◆ Bright

Color

- ◆ All the colours are available.

Water. Vaporpermeability

- ◆ SD (m) (TS EN ISO 7783-2):
Approximately: 100

Drying Time

- ◆ (between +5 +35 °C) complete drying time is 24 hours. Ossification time is one week. Lower temperature or high relative humidity lengthens the drying time.

Coverage

- ◆ Depending on the surface smoothness and absorbency approximately 1,4-1,6 m²/lt.

Shelf Life

- ◆ In package and in 5-35 °C 2 years

Packing

- ◆ 11 kg gunnybag. Gun is in a 4 kg plastic bucket.

Safety Recommendations

- ◆ S2: Keep out the reach of children.
- ◆ S24/25: Avoid contact with eyes and skin.
- ◆ S26: In case of contact with eyes immediately wash with water and contact with a doctor.
- ◆ S28: In case of contact with skin immediately wash with water.
- ◆ S29: Do not discharge into drains or water courses.
- ◆ S46: If swallowed, seek medical advice immediately and show the container or label. Mix before using. Close the cover after using. Protect from frost and direct sunlight.

Quality Certificate

- ◆ TSE TS 5808
Public exposure No. 04.524/604.506/E3

